

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 5201-19400

First Inventor or Application Identifier Darren D. Neuman

Title Audio Calibration System

Express Mail Label No. EL151425007US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 20]
(preferred arrangement set forth below)
 - Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 11]
4. Oath or Declaration [Total Pages 2]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

*** NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ * Small Entity Statement filed in prior application, Status still proper and desired
(PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☐ Other:

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.


17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name	Daniel J. Krueger		
	Conley, Rose & Tayon, P.C.		
Address	PO Box 3267		
City	Houston	State	TX
		Zip Code	77253-3267
Country	USA	Telephone	713-238-8000
		Fax	713-238-8008

Name (Print/Type)	Daniel J. Krueger	Registration No. (Attorney/Agent)	42,771
Signature		Date	3/30/99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

k:\Usi\19400\appln trans form

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR UNITED STATES LETTERS PATENT

AUDIO CALIBRATION SYSTEM

By:

DARREN D. NEUMAN
434-11 GALLERIA DRIVE
SAN JOSE, CALIFORNIA 95134
CITIZENSHIP: USA

AUDIO CALIBRATION SYSTEM

5

CROSS-REFERENCE TO RELATED APPLICATIONS

Not applicable.

10

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

Not applicable.

15

BACKGROUND OF THE INVENTION

Field of the Invention

20

The present invention generally relates to an audio calibration system and more particularly to a technique for calibrating an audio system for any desired listening location. Still more particularly, the invention relates to a method and apparatus for tuning an audio system to cause a "null" point to be located at any desired location in the room.

Background of the Invention

25

Audio systems are designed to reproduce sound. Stereo systems, for example, reproduce sound from compact discs (CDs), cassette tapes, radio transmissions, and the like. Regardless of whether the audio system is a stand-alone stereo system, an audio system incorporated into a personal computer, or any other type of audio system, it is desirable to reproduce the sound as accurately as possible. Thus, audio systems are designed to recreate sound that is as close to the original recorded sound as possible.

30

Audio systems include a speaker, or other type of sound generating device, that converts an electrical signal into sound waves that emanate from the speaker, travel through the air, and into a person's ears. Audio systems include at least one speaker, and often include two or more

speakers for stereo sound. A surround-sound system, for example, typically includes five speakers.

Sound takes a finite amount of time to travel between two points. The speed of sound through air at ground level is approximately one foot per millisecond. Thus, if a sound pulse emanates from two speakers at precisely the same instant in time, the sound pulse from both speakers will arrive at precisely the same time to a person that it is an equal distance from each speaker. If, however, that person is closer to one speaker than the other speaker, the sound pulse from the closer speaker or will arrive to the person before the samples from the other speaker, thereby causing a distortion in the perceived sound by the person. This problem is exacerbated in a surround-sound system in which the person listening to the system is located at different distances from each speaker.

One approach to solving this problem is to manually place each of the speakers connected to the audio system at an equal distance from where the listener is located. If the listener typically listens to music while sitting in a particular chair in a room, each of the speakers will be positioned the same distance from the listener's chair. However, if the listener wishes to listen to music from another position in the room, the speakers may have to be physically moved to calibrate the system to the new location. While the resulting sound quality is generally adequate, this technique often is difficult to implement because furniture in the room and other room specific factors may preclude conveniently locating speakers at equal distances from the listener's chair. Also, many people have speakers that are large enough to preclude being conveniently located in many locations in a room.

Another approach that has been suggested is to measure the distance between the listener's location and each speaker, calculate the difference between those distances, and

introduce a time delay into the audio channel corresponding to the closer speaker. Thus, if the left speaker, in a two speaker system, is measured as being three feet closer to the listener than the right speaker, a technician programs a 3 millisecond time delay into the left audio channel. Three milliseconds is chosen in this example because at a speed of 1 foot per millisecond, it will take sound an extra 3 milliseconds to travel from the right speaker to the listener. The time delay in the left audio channel compensates for the difference in distance between the speakers and the listener. This technique usually requires a skilled technician to setup the audio system and thus, is expensive to perform and adjust if the listener wishes to change his or her listening location.

Thus, an improved technique for calibrating an audio system to a listener's location is needed. The new technique should be easy to perform and preferably not require a highly skilled technician. Despite the advantages such an audio calibrating system would offer, to date no such system is known to exist.

BRIEF SUMMARY OF THE INVENTION

The deficiencies noted above are solved in large part by an audio calibration system generally comprising control logic, an input device, a display, a noise generator, an inverter, a plurality of speakers, and a delay module coupled to each speaker. Upon receipt of a calibration start signal from the input device, the control logic directs the noise generator to produce substantially random noise which is then provided through the delay modules to each speaker. The inverter inverts the random signal to one of the speakers. Thus, in a two speaker system the sound emanating from one of the speakers is an inverted version of the sound emanating from the other speaker. At the points where the sound from each speaker combine, a null line is created as the two sources of sound cancel one another. The control logic controls the amount of delay introduced by each delay module into the sound provided to each speaker. By varying the

amount of the time delay, the control logic can control the position of the null line to coincide with a listener's desired listening location.

The preferred embodiment can be extended into a surround-sound system comprising five speakers. Each audio channel may include a time delay and the audio calibration system can be used to calibrate the null line produced by pairs of speakers. These and other advantages will become apparent once the following disclosure and accompanying drawings are read.

BRIEF DESCRIPTION OF THE DRAWINGS

For a detailed description of the preferred embodiments of the invention, reference will now be made to the accompanying drawings in which:

Figure 1 shows an audio calibration system constructed in accordance with the preferred embodiment;

Figure 1A shows an alternative embodiment of the audio calibration system using a digital video disk decoder and a digital signal processor;

Figure 2 shows the random or pseudo-random noise signals generated by the audio calibration system of Figure 1 that are used in the calibration process;

Figure 3 illustrates a "null line" in a two speaker audio system;

Figure 4 illustrates the change in position of the null line caused by a time delay in one of the audio channels;

Figure 5 shows the amplitude of the noise with respect to position illustrating the null line both with and without low pass filtering;

Figure 6 shows a graphical image of the relative location of the null line for providing visual feedback to the user during the calibration process;

Figure 7 shows an exemplary placement of speakers in a five speaker audio system;

Figure 8 shows an audio calibration system used to calibrate the exemplary five speaker system shown in Figure 7;

Figure 9 shows the method for calibrating the five speaker system of Figure 7 using the audio calibration system shown in Figure 8; and

Figure 10 shows an alternative embodiment using a sound detector to calibrate automatically the audio system to a desired listener location.

Certain terms are used throughout the following description and claims to refer to particular system components. Often, many companies in an industry refer to the same component by different names. This document does not intend to distinguish between components that differ in name but not function. In the following discussion and in the claims, the terms “including” and “comprising” are used in an open-ended fashion, and thus should be interpreted to mean “including, but not limited to...”. Also, the term “couple” or “couples” is intended to mean either an indirect or direct electrical connection. Thus, if a first device couples to a second device, that connection may be through a direct electrical connection, or through an indirect electrical connection via other devices and connections.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to Figure 1, an audio calibration system 100 constructed in accordance with the preferred embodiment generally includes a control logic 102, an input control device 106, a display 110, a noise generator 114, a low pass filter 118, an inverter 122, delays 126 and 134, and left and right speakers 130 and 138, respectively. The control logic unit 102 couples to the input device 106, display 110, noise generator 114, and time delays 126, 134. The noise generator 114 couples to the low pass filter 118 which, in turn, couples to the inverter 122 and delay 134. Time delays 126, 134, which can be implemented with any suitable technique such as

a first in first out (FIFO) buffer, are controlled independently by control logic 102 to introduce varying amounts of time delay into the audio signals provided to each speaker 130, 138. The output signal from delay 134 is provided to the right speaker (R) 138.

The control logic 102 can be any suitable microcontroller such as a digital signal processor (DSP) manufactured by LSI Logic, a DSP integrated within another audio device, or a discrete logic circuit for controlling operation of the audio calibration system 100 according to the principles described below. The input device 106 is used to provide a control signal to control logic 102 for calibrating the audio system. The input device 106 can be any suitable input control device such as a computer joystick, a television or VCR remote control, or any other control device capable of providing at least two control signals to control logic 102. The input device may be hard-wired directly into the control logic or have a wireless interface such as through well known RF or infrared communication techniques. A "universal" remote control capable of controlling multiple electronic devices is acceptable. Universal remotes typically have an "auxiliary" setting for controlling any desired device in addition to predetermined settings for a television, VCR, and cable box. The auxiliary setting can be used to provide control signals to the control logic 102.

An alternative embodiment of audio calibration system 100 is shown in Figure 1A. As shown, this embodiment includes a host CPU 250, a digital video disk player (DVD) 252, DVD decoder 254, a television (TV) 256, DSP 258 and left and right speakers 130, 138. The host CPU 250 communicates with the DVD decoder 254 over host bus 264. The DVD decoder also couples to the DVD player 252, TV 256, and DSP 258 as shown. The DSP 258 generates the audio signals provided to speakers 130, 138. The DVD decoder 254 preferably includes an on-screen display (OSD) controller 260 and an audio decoder 262 which interfaces to DSP 258.

The OSD controller 260 generates video signals which are provided for display on TV 256. The following discussion focuses on the embodiment shown in Figure 1, but it should be understood that the invention can be implemented with the embodiment of Figure 1A, or any other suitable architecture.

5 The display 110 preferably comprises any suitable type of visual device. For example, the display may include a television or computer monitor. Further, display 110 may comprise a display integrated into audio equipment such as a stereo receiver, VCR, or digital video disk (DVD) player. The display 110 need only be sufficient to provide visual feedback to the user during the audio calibration process as described below.

10 To begin the calibration process, the user operates the input control device 106 to transmit or assert a begin calibration signal to the control logic 102. In response, control logic 102 provides a control signal to the noise generator 114. The noise generator then produces substantially random noise. Random noise is noise whose autocorrelation is zero. The noise signal may also be pseudo-random which is approximately random and is easily generated using
15 conventional techniques such as that described in The Art of Electronics, 2nd edition, Cambridge University Press, 1989, pages 430 - 433, 654 - 667, incorporated herein by reference. Any other type of signal that can cause a single "null" line or point as described below can also be used. Generally, the signal will have no significant autocorrelation value within the wavelength limits of the room size. For purposes of discussing the preferred embodiment, the following discussion
20 refers to a random noise signal. The noise produced by noise generator 114 preferably is filtered by low pass filter 118, although filtering is not required. The benefit of low pass filtering the noise signal is illustrated in Figure 5 and is discussed below.

After being filtered by low pass filter 118, the low pass filtered random noise signal is provided to inverter 122 and to delay 134. Inverter 122 inverts the filtered signal as is shown in Figure 2. An exemplary portion of the filtered random noise signal provided to delay 134 associated with the right speaker is illustrated in Figure 2A. Figure 2B represents the same random signal as in Figure 2A, but inverted by inverter 122. Any suitable inverter circuit can be used such as an operational amplifier manufactured by Analog Devices. Optionally, inversion can be accomplished digitally in a DSP. In that case, inversion refers to sign inversion of the audio samples. In fact, if the embodiment of Figure 1A is used, the DSP 258 preferably generates the random noise and delay and performs inversion.

Referring now to Figures 2A, 2B, and 3, the effect of providing the random noise signal to the right speaker and an inverted version of the same random signal to the left speaker is that when the two signals are broadcast at identical volumes through the speakers 130 and 138, the two random audio noise signals will cancel each other at various points in the room. As shown in Figure 3, an imaginary line will exist along which the sound is greatly attenuated because the two noise signals have cancelled each other. That line is called the "null line" and represents the set of points at which the $R_{noise} + L_{noise} = 0$. Although sound is emanating at normal volume from both speakers, the volume level will be much lower, if not 0, along the null line.

The audio calibration system 100 generally is used to calibrate or tune the audio system to cause the null line to coincide with the listener's preferred listening location. Because the sound waves that emanate from each speaker travel through air at the same speed, approximately 1 foot/millisecond, the two random noise signals will combine essentially to zero at points that are an equal distance from each speaker. Thus, as shown in Figure 3, the null line is located at the geometric center line between the two speakers. That is, the distance from any point on the

5 null line to either speaker is exactly the same. A listener located along the null line will hear sound, arriving from one speaker at the same time as comparable, univerted sound from the other speaker. As the listener moves away from the null line shown in Figure 3, the listener will hear sound from the closest speaker before hearing the comparable sound from the farthest speaker, even though the sound was generated by both speakers at exactly the same time.

10 In accordance with the preferred embodiment, the audio calibration system includes programmable time delay modules 126 and 134 which cause a time delay to be introduced into associated audio channel. Referring to Figure 4, for example, a time delay has been introduced into the left channel using delay 126. This delay causes the null line to curve and to shift to the left closer to the left speaker 130. Varying the amount of the time delay permits the null line to be positioned to intersect at any desired location. Introducing a delay in the right channel using delay 134 shifts the null line closer the right speaker 138. The null line represents the optimal listening location because at that location the effect of differences in distance between the speakers and the listener has been removed.

15 Referring again to Figure 1, the listener can control the location of the null line using input device 106. If the input device includes a remote control such as that used with a television, VCR, or DVD player, the listener can control the left and right movement of the null line during the calibration process using the left and right arrow keys which are typically provided on the remote control to change, for example, the channel. Accordingly, if the listener
20 wishes to tune the audio system so that the null line is closer to the left speaker, the listener may press the left arrow key. However, if the listener's location is closer to the right speaker, the listener may press the right arrow key. Rather than a typical television remote control, the input device 106 may comprise a joystick and thus, the null line location can be adjusted by moving

the stick either to the right or left. Any type of input control device that can signal the control logic 102 to program either delay 126 or 134 to move the null line in either direction is suitable and consistent with the preferred embodiment of the invention.

The listener preferably tunes the audio system by moving the null line one way or the other until the sound level heard by the listener drops to a minimum level. Figure 5 graphically illustrates sound level amplitude versus distance of the listener away from the null line both without the low pass filter 118 (curve 142) and with the low pass filter (curve 146). In either case, at locations near the null line, the sound volume begins to reduce. At the null line, the sound volume drops to a minimal level. Without the low pass filter, the sound level does not begin to reduce until the listener is closer to the null line than if the random noise signal is low pass filtered. Accordingly, the low pass filter 118 preferably "widens" the region of reduced sound level on either side of the null line to facilitate detecting the null line as the user controls the delays.

Some form of visual feedback may be helpful to the listener to control the location of the null line. In accordance with the preferred embodiment, a graphical image such as that shown in Figure 6 is shown on display 110 to illustrate the relative location of the null line. If the input control device 106 includes a television remote control, the null line graphically shown can be moved to the left or right by pressing, for example, the left or right arrow keys as described above. The movement of the null line on the display 110 as the user operates the control device 106 provides feedback to the user that the calibration system is responding to the user's control signals as well as indicating the relative position of the null line. This procedure helps a user to find the null location because outside the null all the user hears is noise, so the relative location

of the null may be difficult to find. By including graphic feedback, the relative position of null more easily can be found.

Any mechanism to initiate the calibration sequence is permissible. For example, if a television-type remote control is used, any one of the buttons can be pre-programmed to signal the control logic 102 to begin calibration. Various other audio components not shown in Figure 1 can be deactivated at that point and the calibration system shown in Figure 1 preferably is activated.

The principles described above can be extended to audio systems that have more than two speakers. With more than two speakers, the audio system will generally have a “null point” rather than a null line. Thus, there will be a single point at which sound from each speaker arrives simultaneously relative to the source of the sound.

In Figure 7, an audio/tuning system 200 is shown connected to five speakers in an exemplary “surround-sound” environment. The speakers include a left surround-sound speaker 154 (Ls), a left speaker 130 (L), a center speaker 150 (C), a right speaker 138 (R), and a right-surround-sound speaker 158 (Rs). A listener’s desired listening location is denoted at point 152. That is the point at which the audio system’s null point preferably is located. The audio/tuning system 200 permits the null point to be positioned dynamically at point 152 as described below.

An exemplary embodiment of audio/tuning system 200 is shown in Figure 8. As shown, the system 200 preferably includes control logic 202 coupled to an input control device 106, a display device 110, a noise generator 114, a low-pass filter 118, and delay modules 162, 166, 170, 174, and 178. Each delay module couples to a speaker. Thus, delay module 162 couples to left speaker 130 and delay module 166 couples to left surround sound speaker 154. Further, delay modules 170 couples to center speaker 150. Finally, delay modules 174 and 178 couple to

right surround sound speaker 138 and right speaker 158, respectively. Control signals from the control logic control the amount of delay, if any, each delay module provides in its corresponding audio channel.

An exemplary method of operation of audio/tuning system 200 is shown in the flow chart 300 of Figure 9 and explained with reference to Figure 8. The steps shown are exemplary only of one possible embodiment of the method. The order of the steps can be changed from that shown and other steps can be substituted for those shown without departing from the spirit of the invention. In the first step 302, one of the speakers (e.g., left speaker 130) is chosen as a reference for the tuning process. The selection of which speaker to choose as the reference is not critical; any of the speakers can be chosen as the reference.

In step 306, the noise generator 114 is activated to provide random or pseudo-random noise to the left and right speakers 130, 138. Accordingly, the center and left and right surround-sound speakers 150, 154, 158 are turned off. Turning off a speaker can be accomplished in any of a number of ways. For example, the control signals from the control logic 202 to the delay modules can be encoded to preclude the audio signals from passing through the delay modules to the speakers.

In step 310 the delay modules 162, 178 coupled to the left and right speakers 130, 158 are tuned so as to position the null line with respect to those speakers through the listener's location (position 152 in Figure 7). Then, in step 314 the right speaker is turned off and the center speaker 150 is turned on. At this point only the left and center speakers 130, 150 generate random noise sound. In step 318 a null line is tuned with respect the center and left speakers by adjusting delays 162, 170.

In step 322 random noise is turned on only to the left speaker 130 and left surround-sound speaker 154 and in step 326 a null line is positioned with respect to the two left speakers by tuning the delay modules 162 and 166. Steps 322 and 326 effectively are repeated as steps 330 and 334 but with perspective to be right surround sound and left speakers 138 and 130. The result of these steps this to calibrate the null line with respect to various pairs of speakers through the listener's desired listening location (position 152). Because the resulting null lines will all intersect substantially at position 152, the result is a null point at position 152.

After the user has tuned the null line in each step, 310, 318, 326, and 334, control passes to the next step preferably after the user activates input control device 106 to signal the control logic 202 of the completion of each tuning step.

An alternative embodiment includes electronic processing of the random noise sound to detect the null points, rather than a human listening for the null points. In this alternative embodiment, illustrated schematically in Figure 10, a sound detector such as microphone 104 is positioned at the listener's desired listening location and the listener initiates the calibration process by activating a control input device 106.

The microphone 104 provides the detected audio signal to the audio calibration system 100 and the control logic included therein processes the signal and adjusts the delays 126, 134. When the control logic detects a minimum sound level, the control logic determines that the null line coincides with the location of the microphone. The minimum point can be determined with any suitable technique such as point-by-point comparison or by computing the first derivative of the audio signal and determining when the derivative value is approximately zero. This alternative embodiment can also be used in the five speaker calibration system of Figure 8, as well as with any other number of speakers.

The embodiments described above can be implemented in hardware or software. In a software embodiment, the control logic 102, 202 represents a microcontroller than executes code implementing the functionality described above.

The above discussion is meant to be illustrative of the principles of the present invention.

- 5 Numerous variations and modifications will become apparent to those skilled in the art once the above disclosure is fully appreciated. It is intended that the following claims be interpreted to embrace all such variations and modifications.

CLAIMS

WHAT IS CLAIMED IS:

- 1 1. an audio calibration system, comprising:
 - 2 a control logic;
 - 3 an input device coupled to said control logic;
 - 4 a display coupled to said control logic;
 - 5 a noise generator for generating a substantially random noise signal and coupled to said
 - 6 control logic;
 - 7 a plurality of speakers coupled to said noise generator; and
 - 8 delay modules coupled between said noise generator and said plurality of speakers for
 - 9 introducing time delays in the sound produced by the speakers.
- 1 2. The audio calibration system of claim 1 wherein the substantially random noise signal
- 2 has an auto correlation of 0.
- 1 3. The audio calibration system of claim 1 wherein the substantially random noise signal is
- 2 pseudo-random.
- 1 4. The audio calibration system of claim 1 wherein said plurality of speakers includes five
- 2 speakers.

1 5. The audio calibration system of claim 1 wherein said control logic causes said display to
 2 display a visual image that indicates the relative position of a null line, wherein the position of
 3 the null line is determined by the time delays of the delay modules.

1 6. The audio calibration system of claim 1 wherein said input device is wirelessly coupled
 2 to said control logic.

1 7. The audio calibration system of claim 1 further including an inverter coupled between
 2 said noise generator and at least one delay module.

1 8. The audio calibration system of claim 7 further including a low pass filter coupled
 2 between said noise generator and said delay modules for low pass filtering the noise signal.

1 9. An audio calibration device, comprising:
 2 a control logic;
 3 an input device coupled to said control logic;
 4 a noise generator for generating a substantially random noise signal and coupled to said
 5 control logic;
 6 a low pass filter coupled to said noise generator for filtering the random noise signal from
 7 said noise generator;
 8 an inverter coupled to said low pass filter;
 9 a first delay module coupled to said inverter for introducing a time delay into an output
 10 signal from said inverter; and

11 a second delay module coupled to said low pass filter for introducing a time delay into an
12 output signal from said filter, wherein said control logic controls the amount of time delay
13 introduced by each delay module to thereby vary the location of a null line.

1 10. The audio calibration device of claim 9 further including a display unit coupled to the
2 control logic for displaying a visual image indicative of the relative location of the null line.

1 11. The audio calibration device of claim 10, wherein said display controller includes an on-
2 screen display controller implemented in a DVD decoder.

1 12. The audio calibration device of claim 10 further including a sound detector coupled to
2 said control logic, said control logic determines the presence of the null line by processing an
3 audio signal from said sound detector.

1 13. The audio calibration device of claim 10, wherein said noise generation and low pass
2 filter are implemented using digital signal processing.

1 14. The audio calibration system of claim 10 further including speakers coupled to said delay
2 module.

1 15. A method for calibrating an audio system including multiple speakers, comprising:
2 choosing one of the speakers to be a reference speaker;
3 providing substantially random noise to said reference speaker and a first speaker; and

4 tuning a time delay to one of the speakers provided with substantially random noise to
5 adjust the location of a null line caused by said reference and second speakers.

1 16. The method of claim 15 further including:
2 providing substantially random noise to said reference speaker and a second speaker; and
3 tuning a time delay to one of the reference or second speakers to adjust the location of a
4 null line caused by said reference and second speakers.

1 17. The method of claim 16 further including:
2 providing substantially random noise to said reference speaker and a third speaker; and
3 tuning a time delay to one of the reference or second speakers to adjust the location of a
4 null line caused by said reference and third speakers.

1 18. The method of claim 15 wherein said tuning step includes:
2 receiving an audio signal from a microphone; and
3 processing said audio signal to determine a minimum amplitude level.

1 19. An audio calibration, including:
2 a means for generating a substantially random noise signal;
3 a delay means coupled to said noise signal generating means for introducing time delays
4 in the substantially random noise signal; and
5 a means for controlling the amount of time delay introduced by said delay means to
6 control the location of a null point.

1 20. The audio calibration system of claim 19 further including a filtering means coupled to
2 said noise signal generating means for low pass filtering the substantially random noise signal.

1 21. The audio calibration system of claim 20 further including a means for displaying the
2 relative location of the null point.

1 22. A computer readable storage medium for storing an executable set of software
2 instructions which, when inserted into a host computer system, is capable of controlling the
3 operation of the host computer, said software instructions being operable to calibrate the location
4 of a null point associated with an audio system, said software comprising:

5 a means for generating a substantially random noise signal;

6 a delay means for selectively introducing a time delay into the substantially random noise
7 signal; and

8 a means for controlling the amount of time delay introduced by said delay means to
9 control the location of the null point.

1 23. The invention of claim 22 further including a means for low pass filtering the
2 substantially random noise signal.

1 24. The invention of claim 23 further including a means for displaying the relative location of
2 the null point.

ABSTRACT

An audio calibration system includes control logic, an input device, a display, a noise generator, an inverter, a plurality of speakers, and a delay module coupled to each speaker. Upon receipt of a calibration start signal from the input device, the control logic directs the noise generator to produce substantially random noise which is then provided through the delay modules to each speaker. The inverter inverts the random signal to one of the speakers. Thus, in a two speaker system the sound emanating from one of the speakers is an inverted version of the sound emanating from the other speaker. At the points where the sound from each speaker combine, a "null" line is created as the two sources of sound cancel one another. The control logic controls the amount of delay introduced by each delay module into the sound provided to each speaker. By varying the amount of the time delay, the control logic can control the position of the null line to coincide with a listener's desired listening location. The preferred embodiment can be extended into a surround-sound system comprising five speakers. Each audio channel may include a time delay and the audio calibration system can be used to calibrate the null line produced by pairs of speakers.

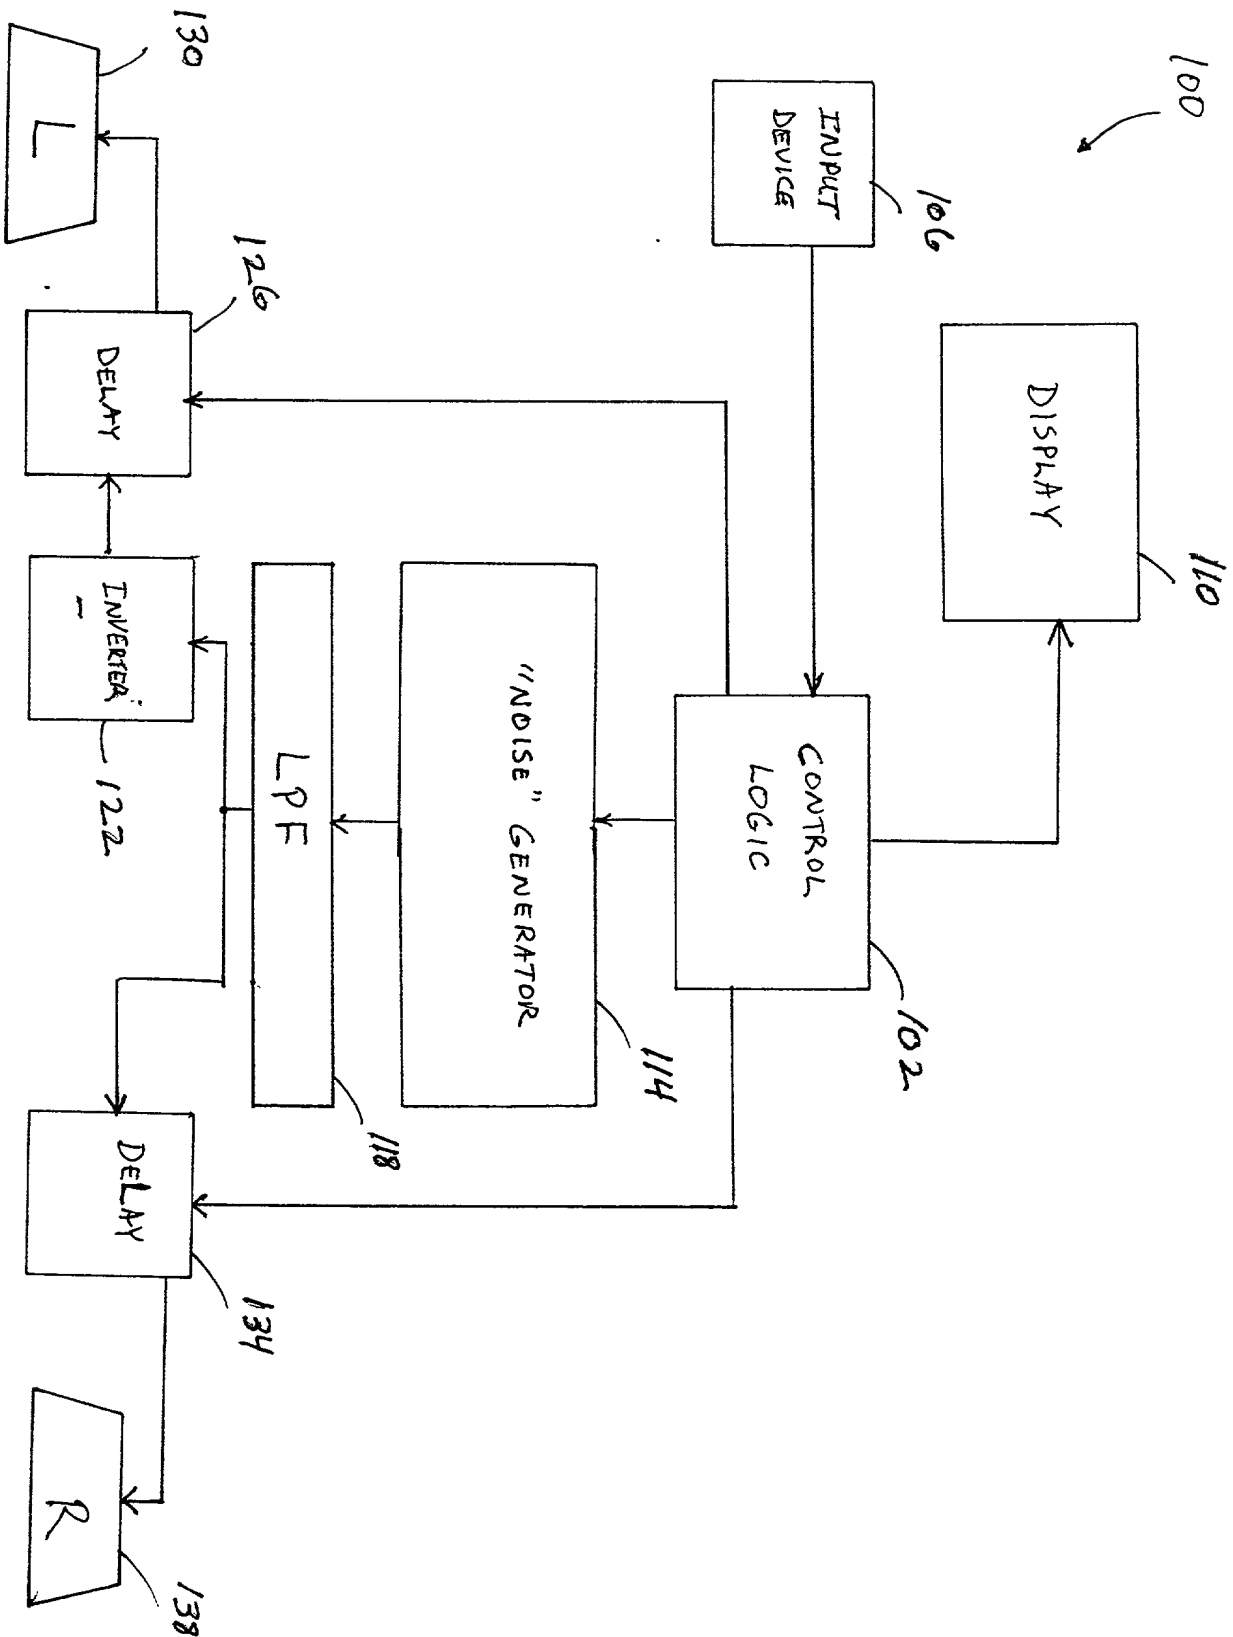


FIG. 1 is a block diagram of a system 100.

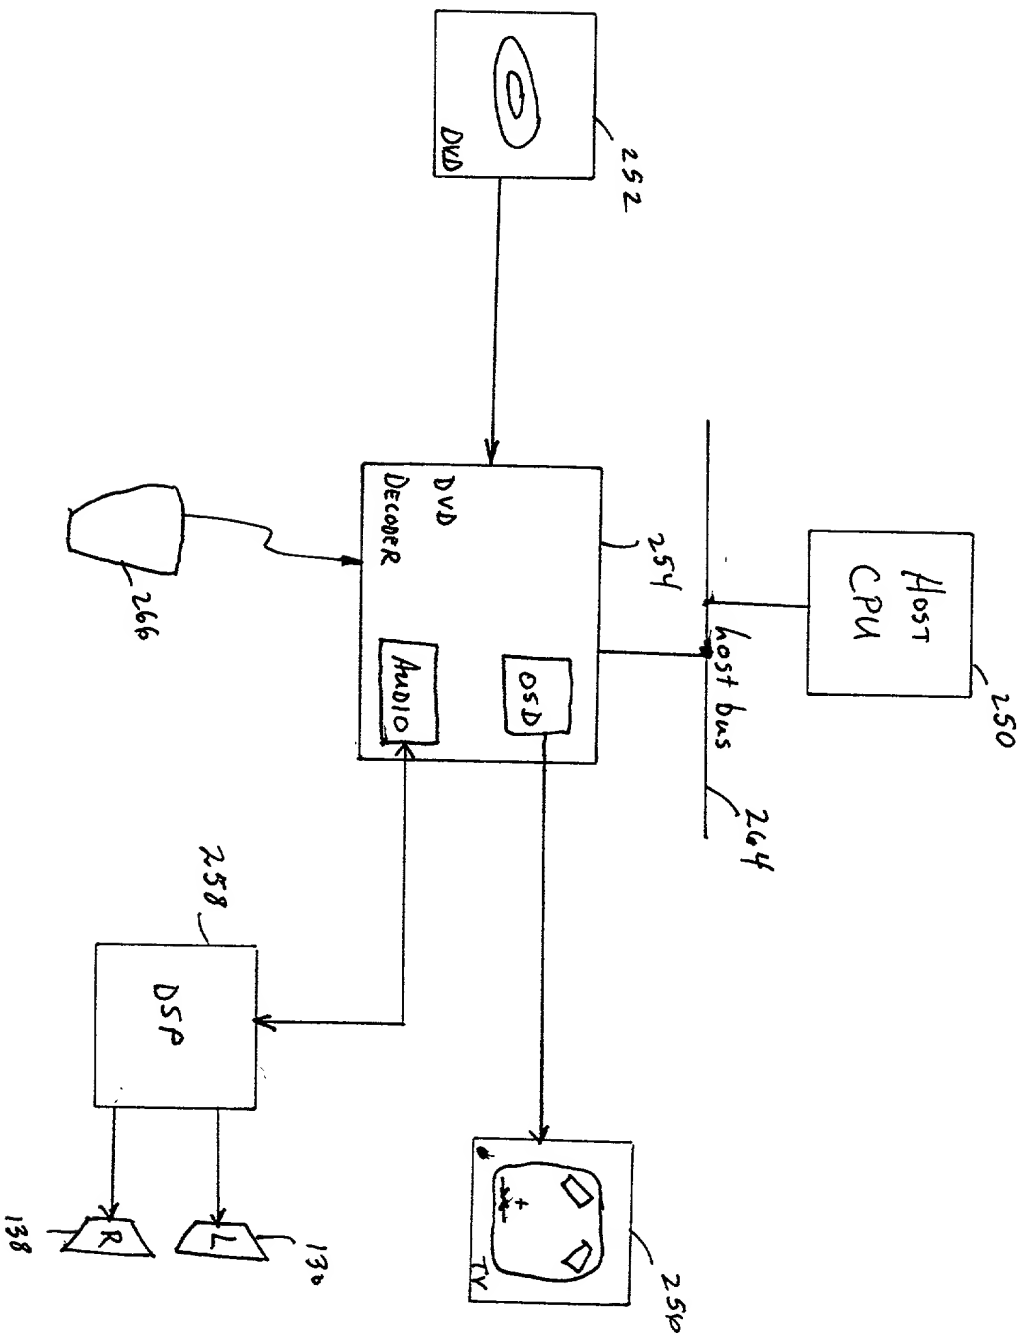


FIG. 14 DVD player system

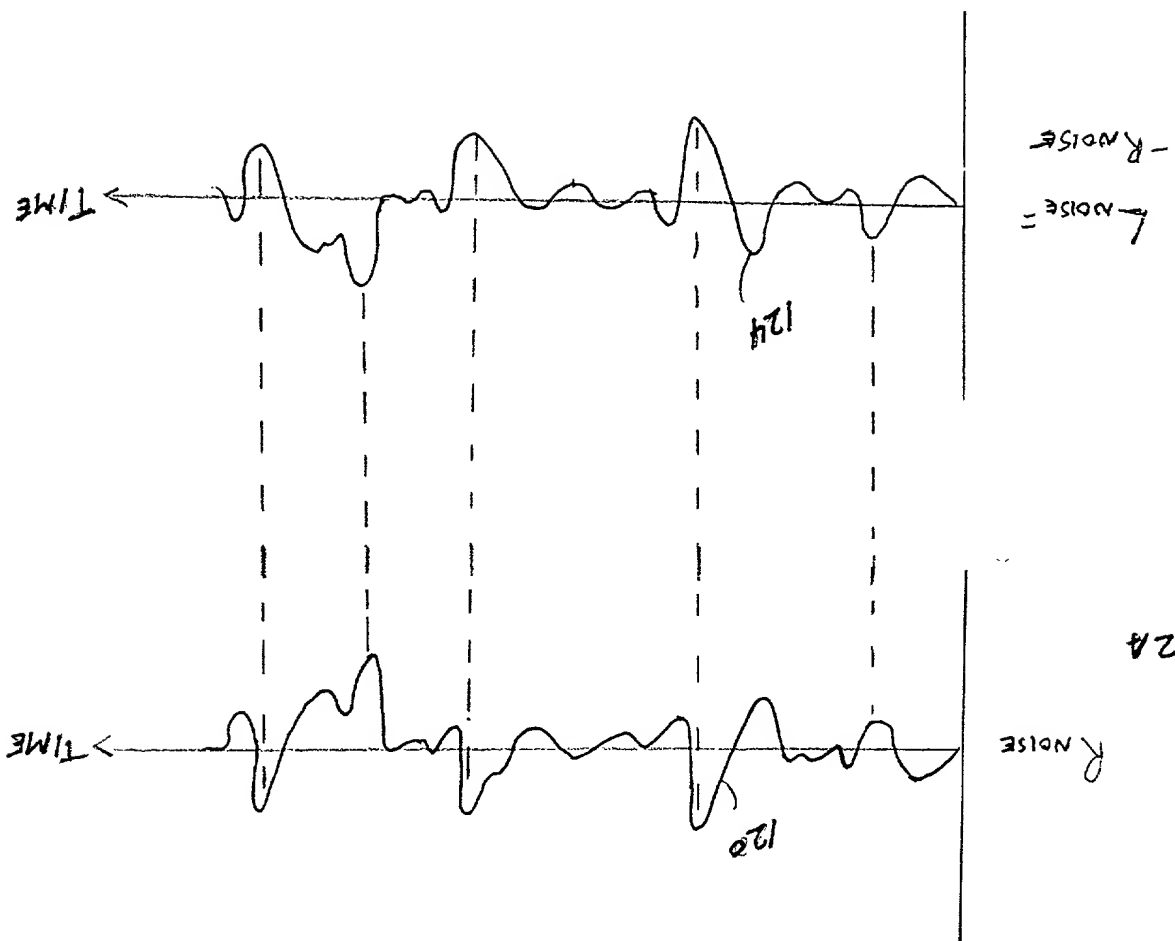


FIG. 2A

FIG. 2B


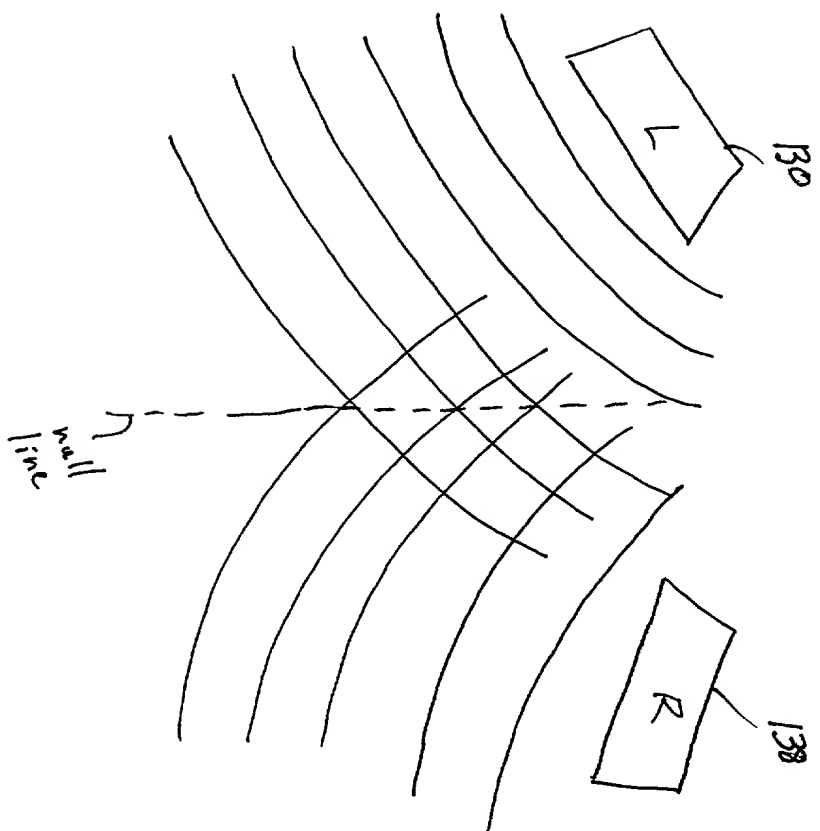



FIG. 3

NOISE
LEVEL

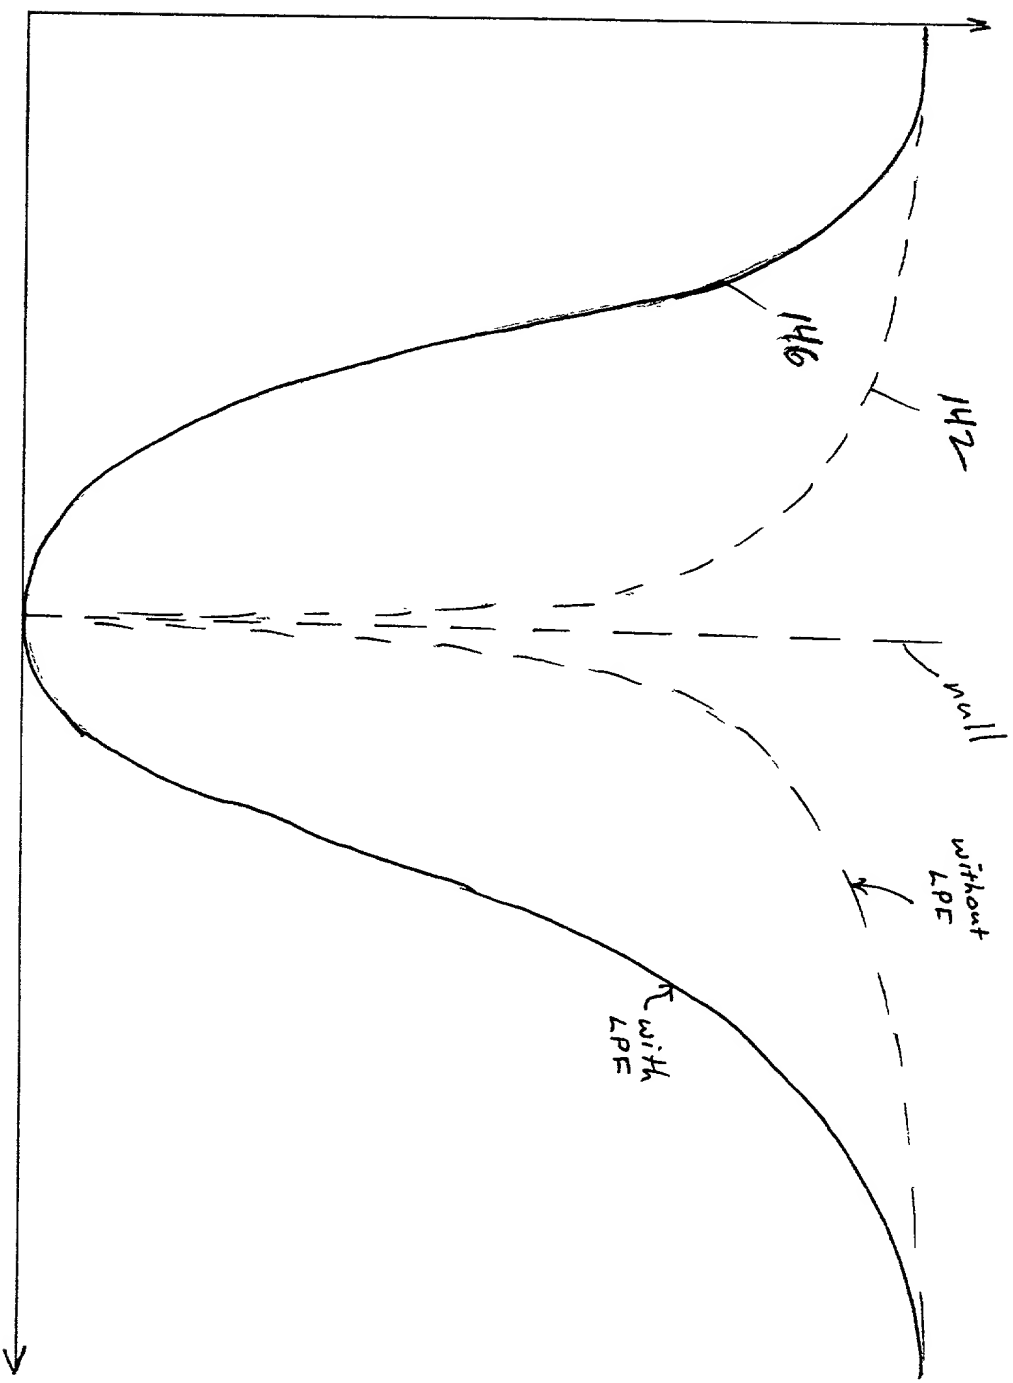


POSITION

092435 . 032099
F16.5

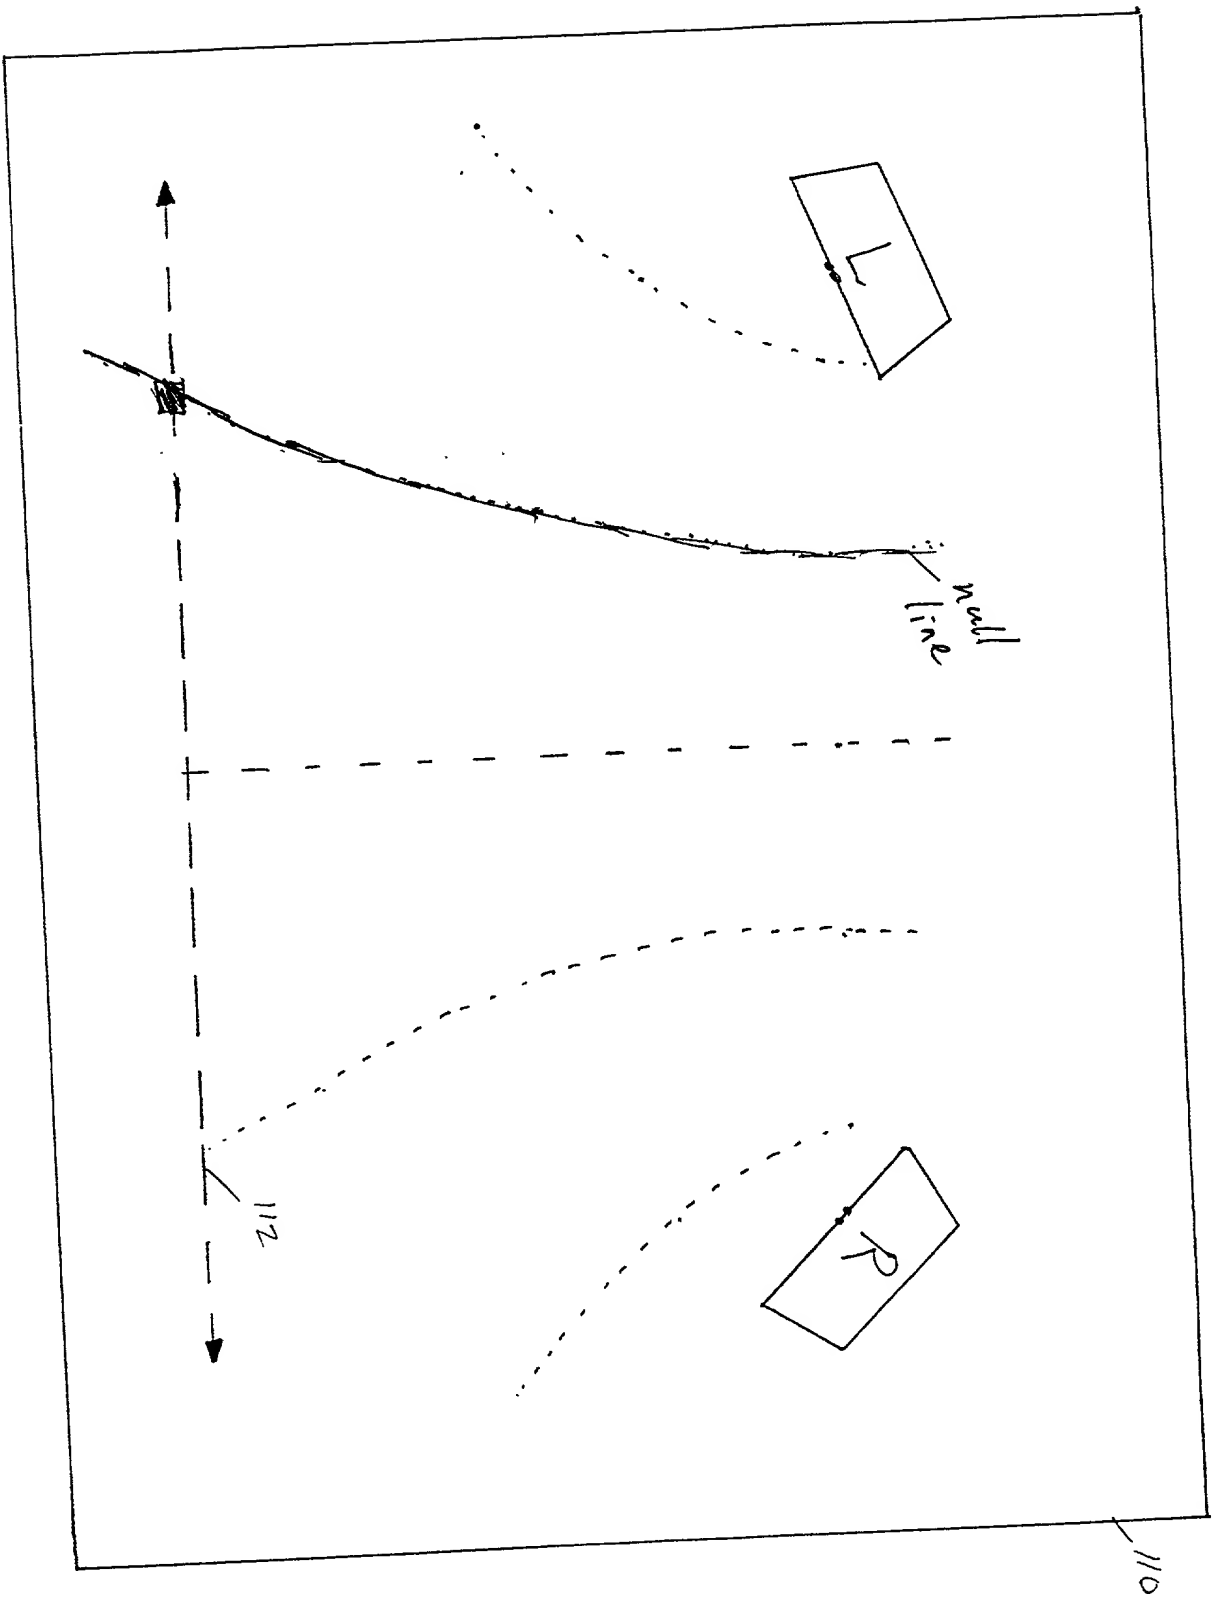

09224365.032099

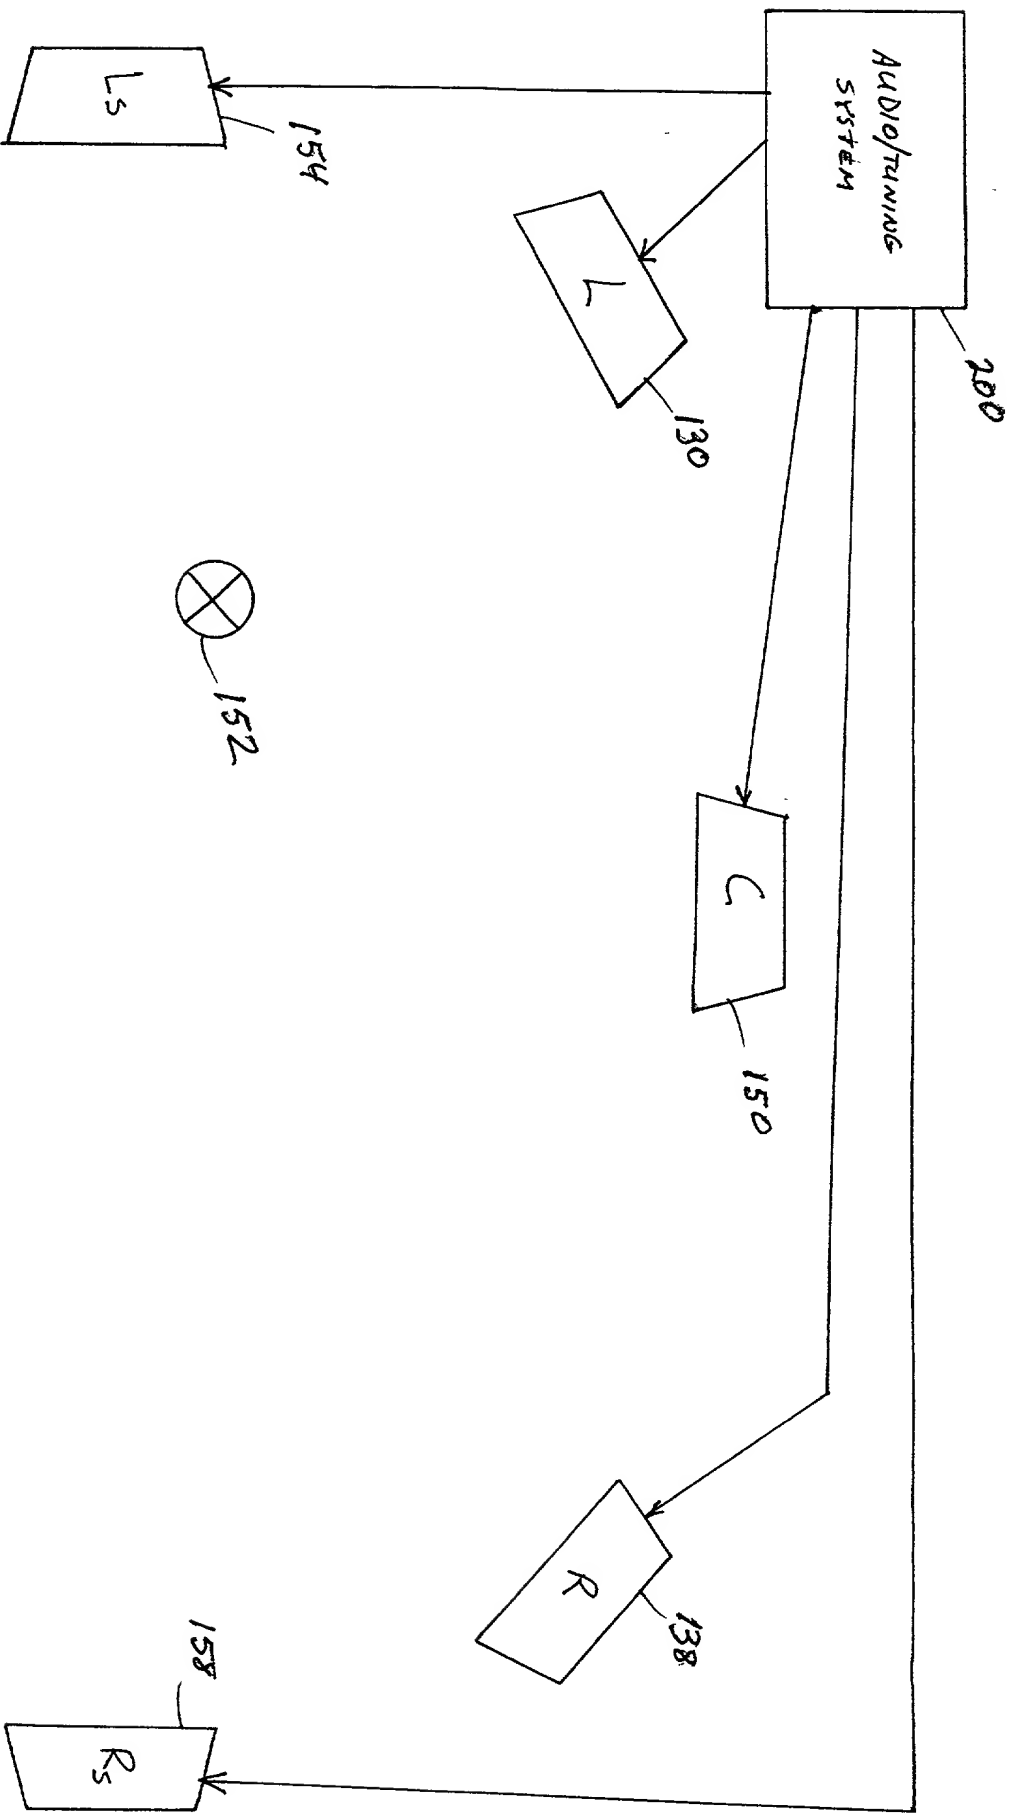

F167

09284365.033099



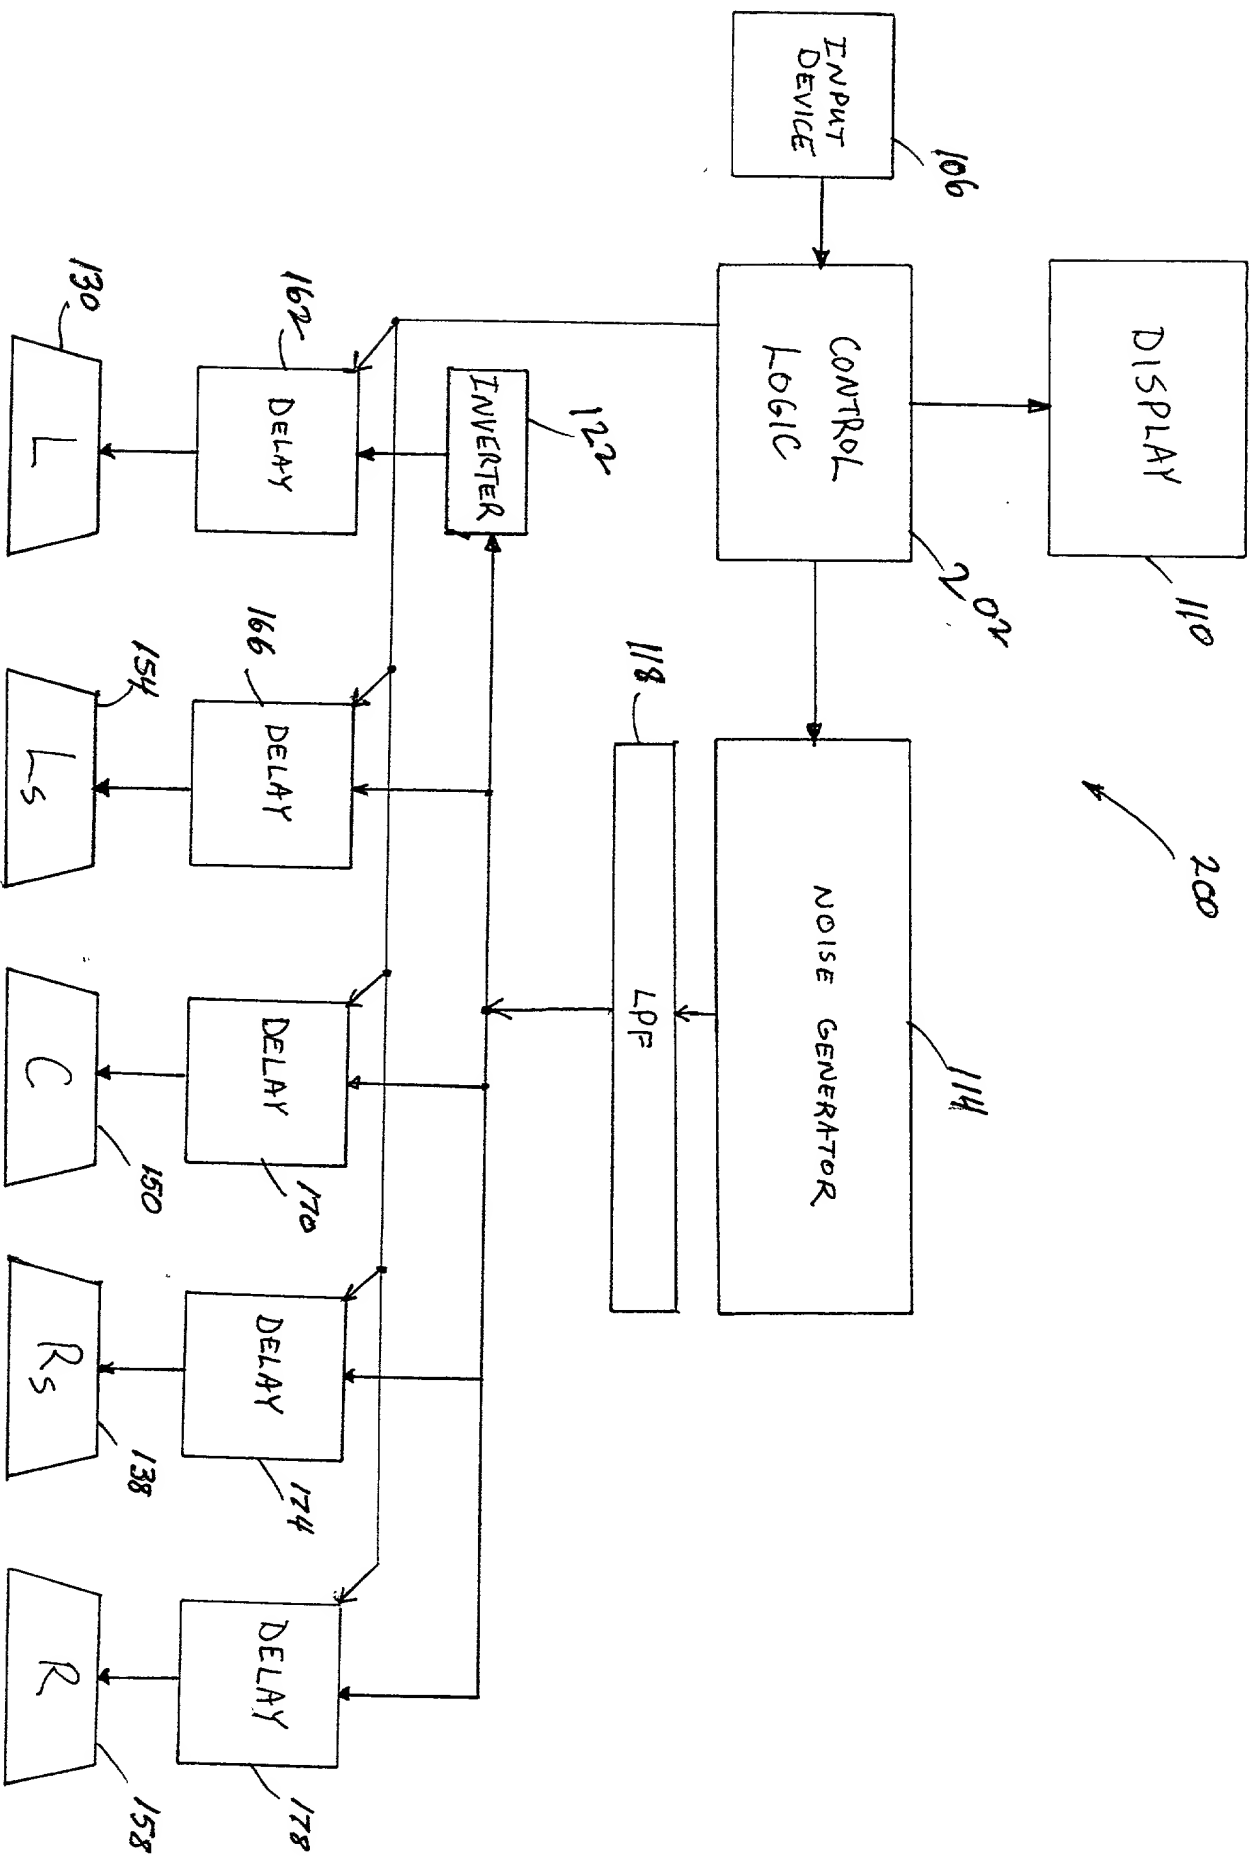


FIG. 8

09234305 032099

Fig. 9

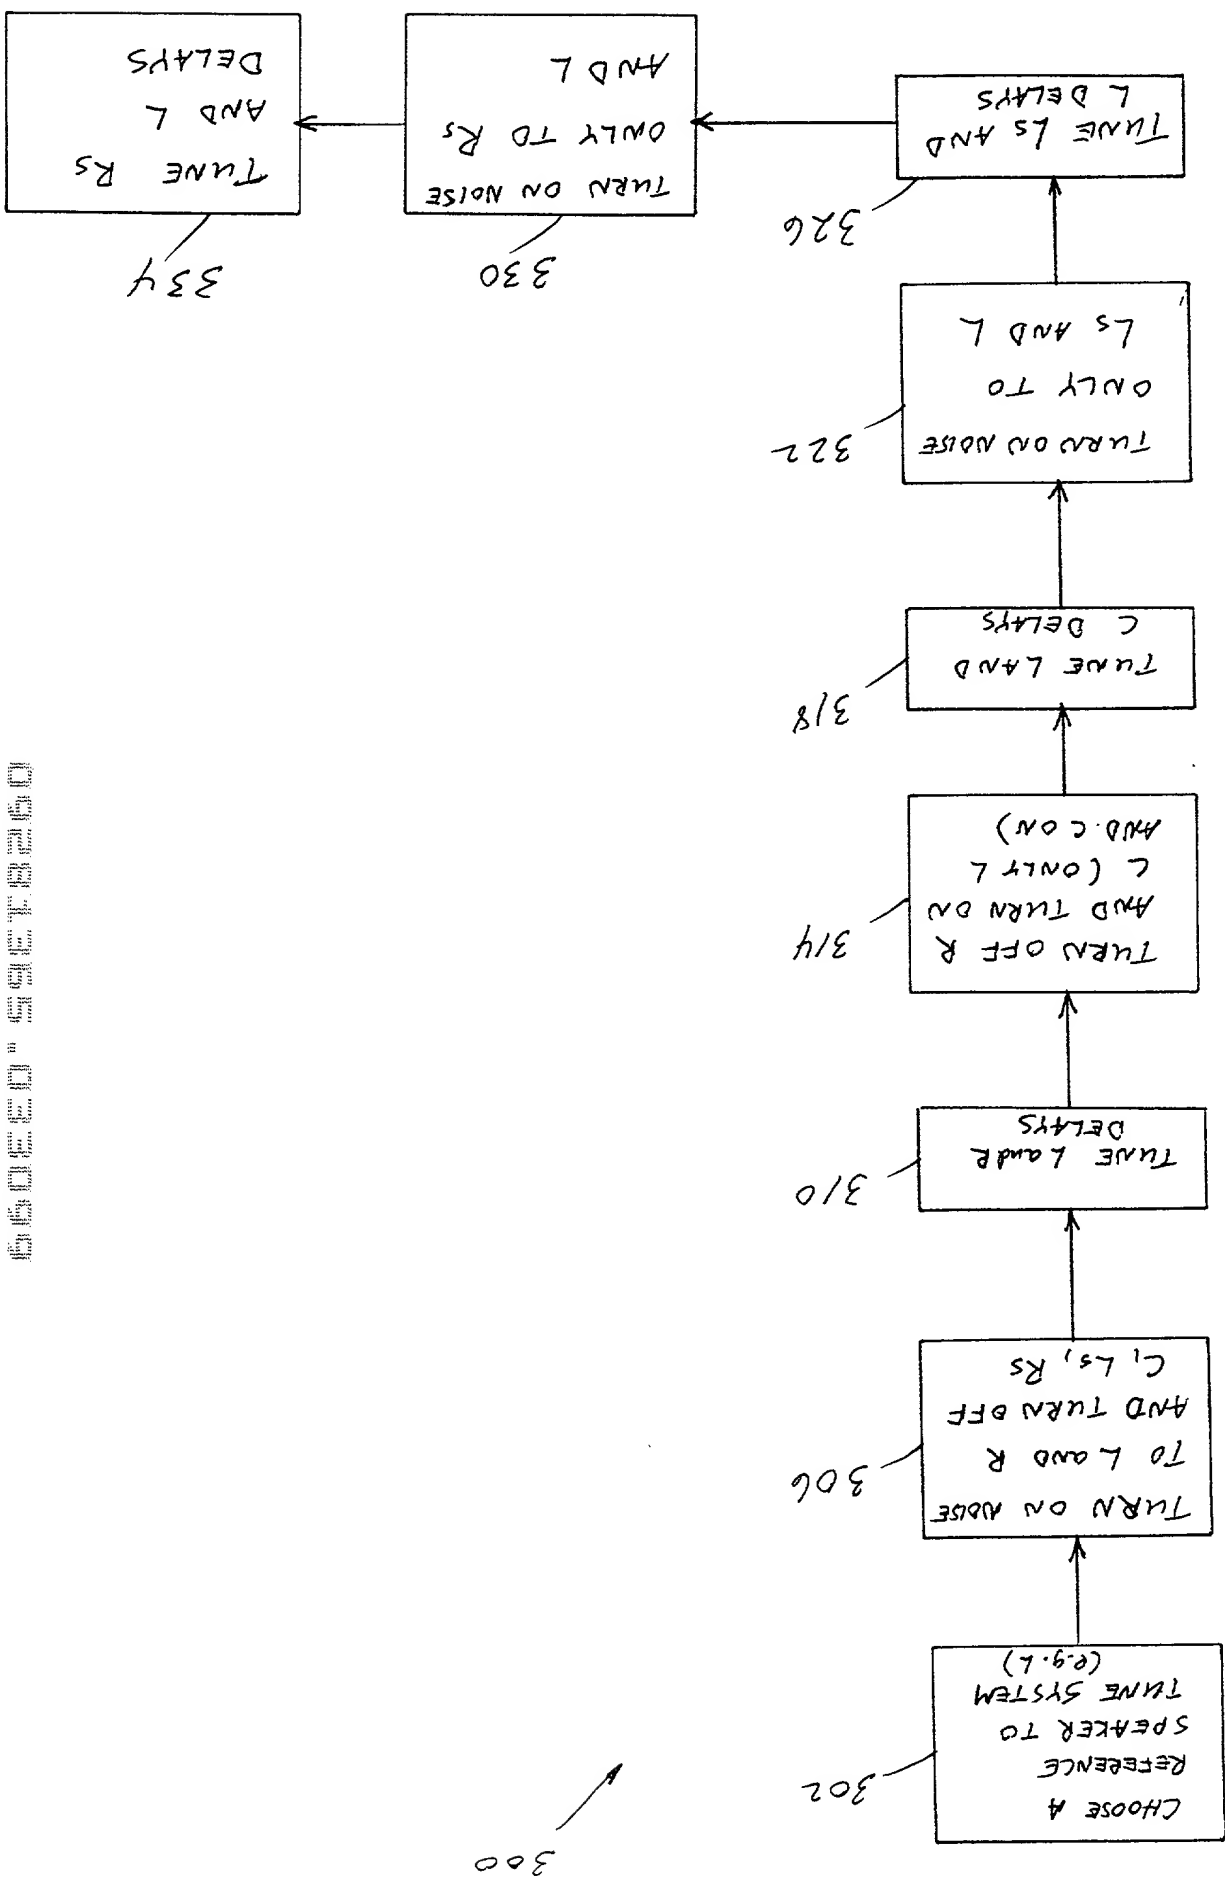

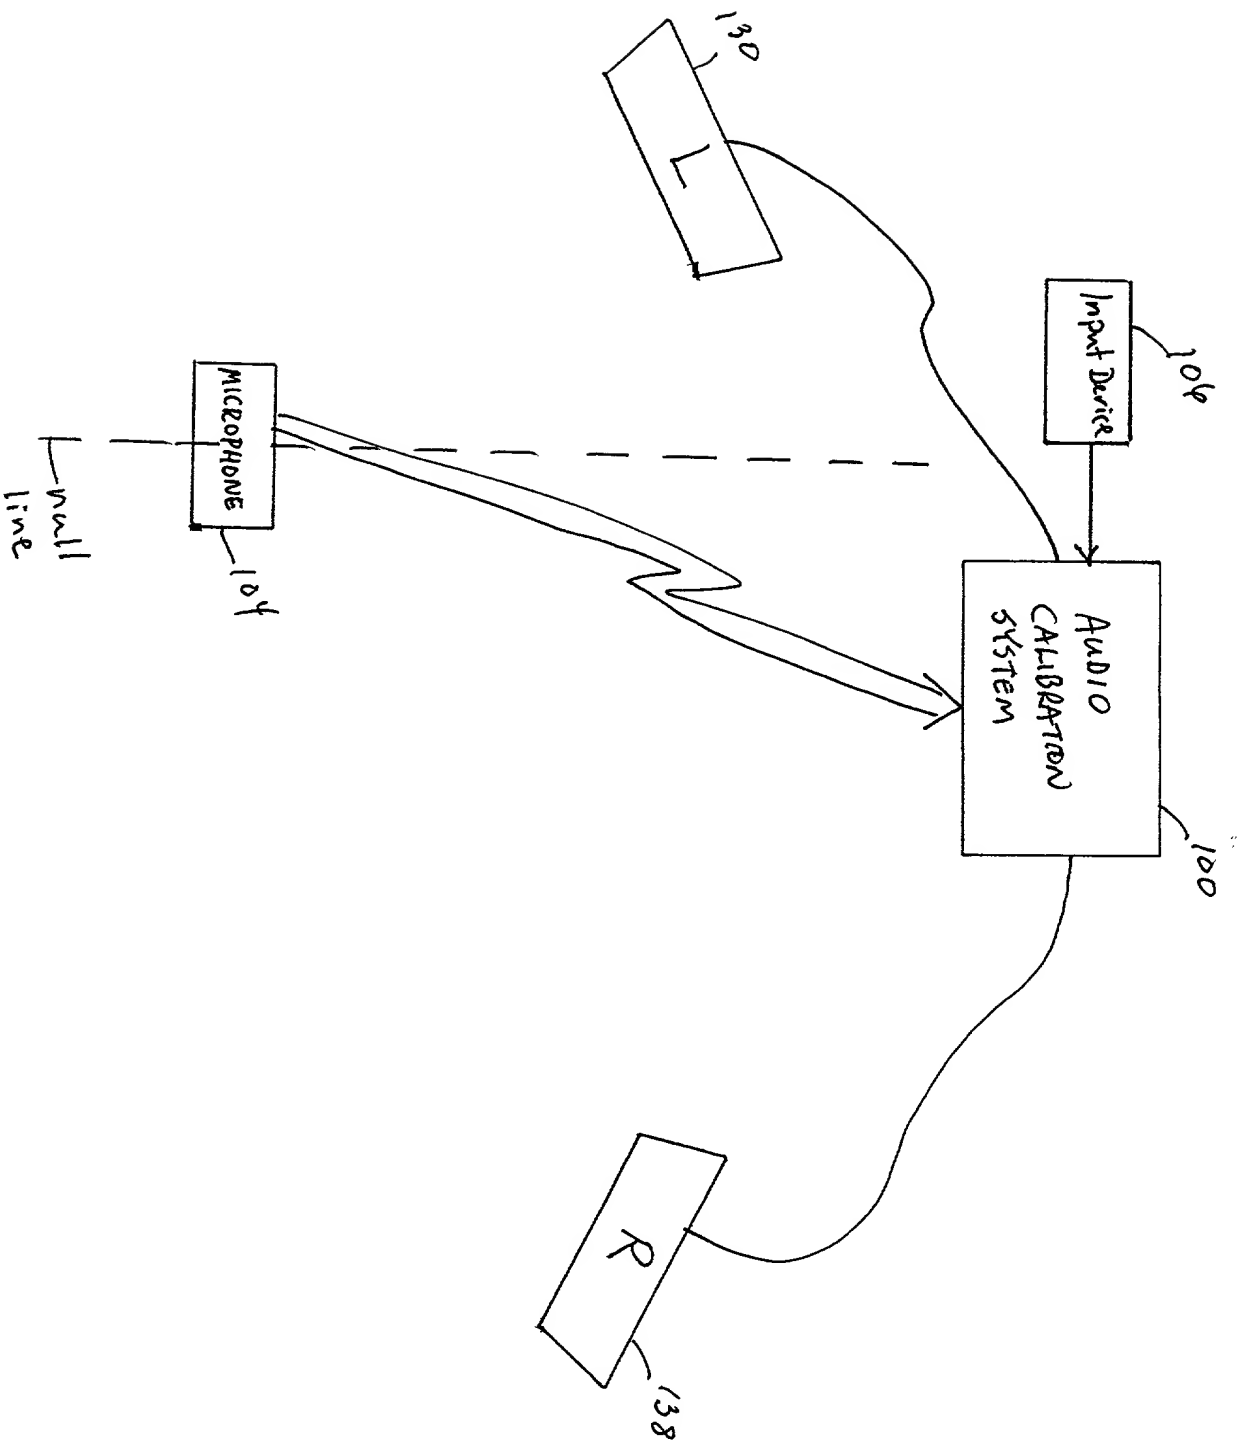

CONFIDENTIAL

PATENT
5201 - 19400
A4-4095

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or the below named inventors believe they are the original, first and joint inventors (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled "**Audio Calibration System**", the specification of which:

 X is attached hereto.
_____ was filed on _____ as Application Serial No. _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability of the subject matter claimed in this application, as "materiality" is defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

Priority
Claimed

N/A
(Number) (Country) (Date Filed)

Yes/No

N/A
(Number) (Country) (Date Filed)

Yes/No

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose all information known to me to be material to the patentability of the subject matter claimed in this application, as "materiality" is defined in Title 37, Code of Federal Regulations, § 1.56, which become available between the filing date of the prior application and the national or PCT international filing date of this application:

N/A
(Application Serial No.) (Filing Date) (Status)

5201-19400-A4-4095

The Assignee hereby revokes any previous Powers of Attorney and appoints

David Pursel	Reg. No. 28,659
Ralph Veseli	Reg. No. 33,807
Wayne Bailey	Reg. No. 34,289
David Lucente	Reg. No. 36,202
Bruce Hopenfeld	Reg. No. 39,714
Sandeep Jaggi	Reg. No. 43,331

each said attorneys being employed by LSI Logic Corporation; and

Darryl J. Adams	Reg. No. 41,424
Mark L. Berrier	Reg. No. 35,066
Dan R. Christen	Reg. No. 39,943
Timothy S. Corder	Reg. No. 38,414
Kevin L. Daffer	Reg. No. 34,146
Jeffrey C. Hood	Reg. No. 35,198
B. Noël Kivlin	Reg. No. 33,929
Robert C. Kowert	Reg. No. 39,255
Lawrence J. Merkel	Reg. No. 41,191
Eric B. Meyertons	Reg. No. 34,876
Eric A. Stephenson	Reg. No. 38,321
David A. Rose	Reg. No. 26,223
Michael F. Heim	Reg. No. 37,702
Daniel J. Krueger	Reg. No. 42,771


each said attorneys being attorneys or agents of the firm of Conley, Rose & Tayon, P.C., as attorney or agent for so long as they remain with such company or firm, with full power of substitution and revocation, to prosecute the application, to make alterations and amendments therein, to transact all business in the Patent and Trademark Office in connection therewith, and to receive the Letters Patent.

Please direct all communications as follows:

Daniel J. Krueger
Conley, Rose & Tayon, P.C.
P.O. Box 3267
Houston, Texas 77253-3267
(713) 238-8000

I hereby declare that all statements made of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's Full Name: Darren D. Neuman
(First) (Initial) (Last)

Inventor's Signature:  Date: 23 Sept '98

City and State (or Foreign Country) of Residence: San Jose, CA Citizenship: USA
Post Office and Residence Address: 434-11 Galleria Drive, San Jose, California 95134
(Include number, street name, city, state and zip code)